



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

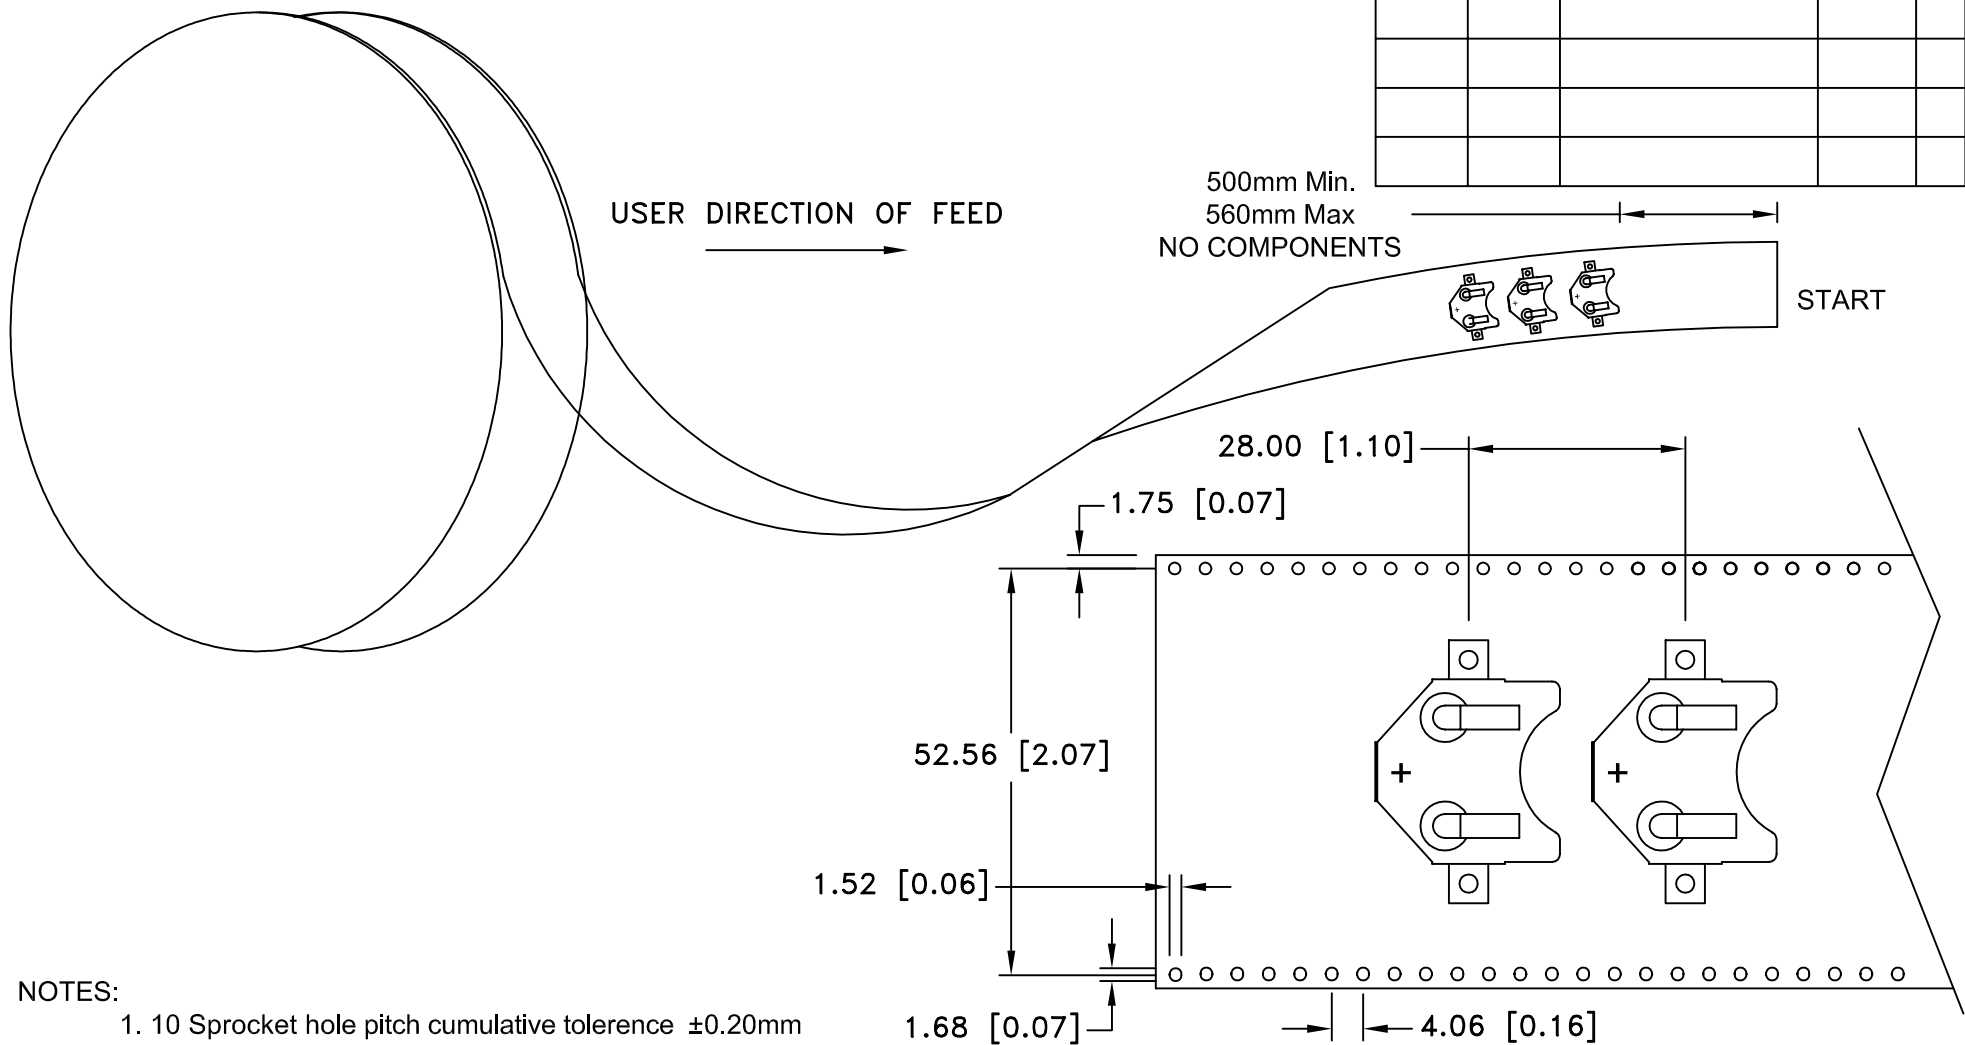

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
  2. Carrier camber not to exceed 1mm in 250mm
  3. Material: Black Conductive Polystyrene
  4. Thickness:  $0.35 \pm 0.05\text{mm}$
  5. Component loader per 13" reel: 450 pcs
  6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal $\pm .5$ (.020)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-886	Date 03/05/05	
Fractional $\pm .8$ (.030)		Drawing Number BK-886-TR-REEL	
Angular $\pm 3^\circ$	Date 03/05/05		