

- Perfect for Decorative Applications
- Antimicrobial and Germicidal Properties
- Provides Form and Functionality

					1 0.0 0 00			
Nominal Size	Part #	Wall Thickness	Min Exp.	Max Exp.	Bulk Spool	Shop Spool	Available Colors	Lbs/ 100'
1/8"	MBB0.13BRS	.015"	1/8"	1/4"	250′	25′	Brass	0.90
1/4"	MBB0.25BRS	.027"	1/4"	3/8"	100′	25′	Brass	3.00
3/8"	MBB0.38BRS	.015"	3/8"	3/4"	100′	25′	Brass	3.00
1/2"	MBB0.50BRS	.020"	1/2"	1"	100′	25′	Brass	4.20

- Put Ups -



Material Brass


Grade MBB

## **Brass Beauty!**

Techflex Flexo Brass can be a useful and beautiful part of your next project. The decorative features of Brass are obvious, but many people don't know that Brass is actually an alloy of Copper and Zinc.


Our Brass is designed for both looks and functionality and can be adapted to create custom hoses and brake lines. Designers and engineers may also use our Brass braid for its natural antimicrobial and germicidal properties. Contact with our Brass braid can kill harmful microorganisms within minutes

Brass braid has been used in "Steampunk" creations of all kinds to bring the hoses of the industrial revolution back to life today

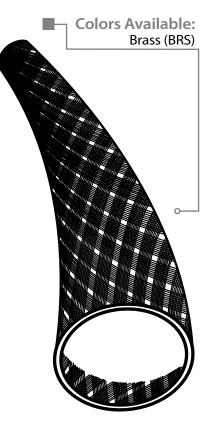











Rating \_\_\_\_\_ Non Flammable

## **CHEMICAL** RESISTANCE

1=No Effect

4=More Affected

2=Little Effect

5=Severely Affected

3=Affected

Aromatic Solvents	
Aliphatic Solvents	1
Chlorinated Solvents	
Weak Bases	
Salts	1
Strong Bases	5
Salt Water <i>0-S-1926</i>	1
Hydraulic Fluid <i>MIL-H-5606</i>	1
_ube Oil <i>MIL-L-7808</i>	1
De-Icing Fluid <i>MIL-A-8243</i>	1
Strong Acids	5
Strong Oxidants	5
Esters/Ketones	1
JV Light	2
Petroleum	2
ungus ASTM G-21	2
Halogen Free	Yes
2-110	V



Monofilament Thickness ASTM D-204	.005
Flammability Rating	Non Flammable
Recommended Cutting	Shears
Colors	1
Wall Thickness	.013
Abrasion Resistance	Med
Specific Gravity	8.5