


inspired LED

# Tiger Paw™ Flex Extender

Inspired LED's patented solderless **Tiger Paw™ Connectors** are the perfect solution for in-field LED system design and customization. These innovative accessories pair with LED flex strips for quick, convenient installation. Now, creating the perfect low-voltage lighting system is easier than ever, thanks to Inspired LED!

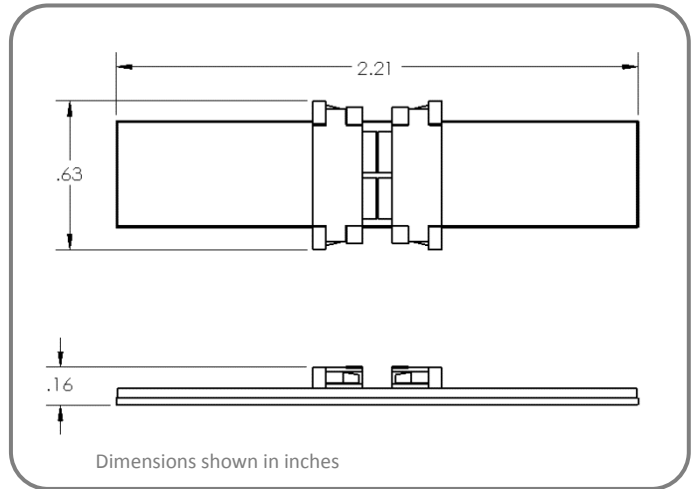

## Product Specifications: SKU# 3498

- Solderless termination for 8-10mm LED flex strips (end to end)
- Max Load- 5 AMPs
- Industry proven locking system meets shock and vibration requirements for IEC 60068-2-27
- U.S. Patent No. 8,714,772

## Instructions:

- 1** Use scissors to cut LED strips to length along copper solder pads ONLY
- 2** Take hold of black sliding latch and pull outward to open
- 3** Peel back adhesive lining on first LED strip
- 4** Insert flex strip into the gap between black sliding latch and beige bridge piece
- 5** Repeat steps three through five to insert flex on opposite side of flex extender
- 6** Ensure that polarities are matched from strip to strip by identifying (+/-) signs marked along the flex
- 7** LED strips should be centered and fully inserted before sliding black latches firmly closed
- 8** Provide power to the end of strip using 12V DC Class 2 power supply, checking all connections before install

**Troubleshooting:** If LEDs are flickering, double check connection to be sure flex is fully inserted and secured, if no lights turn on check to be sure polarities are properly matched



inspiredled.com



orders@inspiredled.com



(480) 941-4286