

Silicon Bridge Rectifier

$V_{RRM} = 50\text{ V} - 1000\text{ V}$

$I_F = 2\text{ A}$

Features

- Types up to 1000 V V_{RRM}
- Ideal for printed circuit board
- Surge overload rating to 65 Amps peak
- High temperature soldering guaranteed 250°C/ 10 seconds
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Reliable, low cost construction utilizing molded plastic technique

KBPM Package



Mechanical Data

Leads: Tin plated copper

Weight: 0.047 oz, 1.33 g

Mounting position: Any

Terminals: Leads solderable per MIL-STD-202, Method 208

Polarity: Polarity marked on body

Maximum ratings, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	KBPM206G	KBPM208G	KBPM210G	Unit
Repetitive peak reverse voltage	V_{RRM}		600	800	1000	V
RMS reverse voltage	V_{RMS}		420	560	700	V
DC blocking voltage	V_{DC}		600	800	1000	V
Continuous forward current	I_F	$T_C \leq 65\text{ °C}$	2	2	2	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ °C}$, $t_p = 8.3\text{ ms}$	65	65	65	A
Operating temperature	T_j		-55 to 150	-55 to 150	-55 to 150	°C
Storage temperature	T_{stg}		-55 to 150	-55 to 150	-55 to 150	°C

Electrical characteristics, at $T_j = 25\text{ °C}$, unless otherwise specified


Parameter	Symbol	Conditions	KBPM206G	KBPM208G	KBPM210G	Unit
Diode forward voltage	V_F	$I_F = 2\text{ A}$, $T_j = 25\text{ °C}$	1.1	1.1	1.1	V
Reverse current	I_R	$V_R = 50\text{ V}$, $T_j = 25\text{ °C}$	5	5	5	μA
		$V_R = 50\text{ V}$, $T_j = 125\text{ °C}$	500	500	500	

Thermal characteristics

Thermal resistance, junction - case	R_{thJA}		14.0	14.0	14.0	°C/W
-------------------------------------	------------	--	------	------	------	------


AVERAGE FORWARD OUTPUT CURRENT, AMPERES

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIER CURRENT

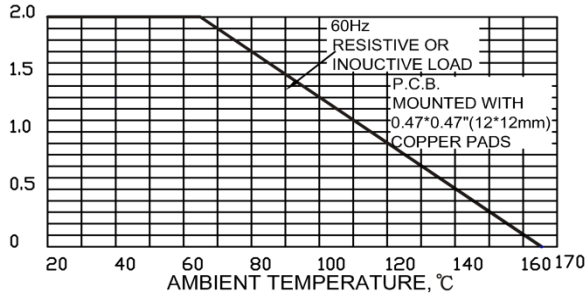


PEFORWARD SURQE CURRENT, AMPERES

FIG.2-MAXIMUN NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

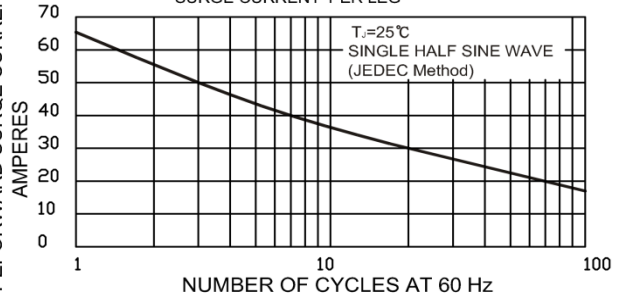


INSTANTANEOUS FORWARD CURRENT AMPERES

FIG.3-TYPICAL FORWARD CHARACTERISTICS PER LEG

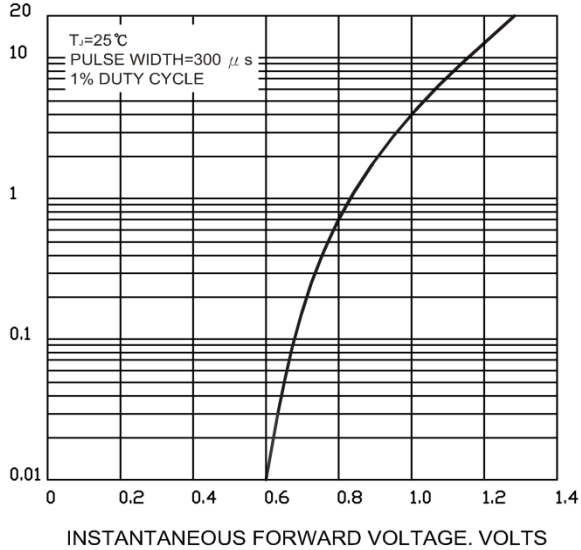

INSTANTANEOUS REVERSE CURRENT, MICROAMPERES

FIG.4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

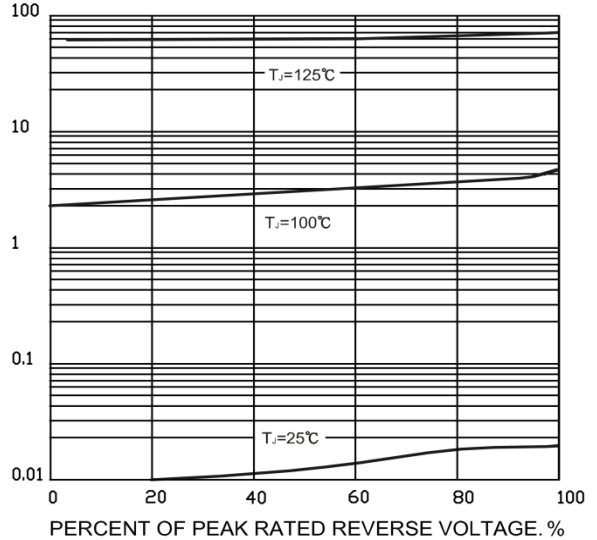

JUNCTION CAPACITANCE, pF

FIG.5-TYPICAL JUNCTION CAPACITANCE PER LGE

